

## Description

This device is power factor correction controller using a discontinuous conduction mode of boost converter. Especially, it is optimized for electronic ballasts which prevent abnormal functions in load runaway and feedback loop fault conditions and low power and high density power supplies which require minimum board size. The external component R/C filter is not necessary because the R/C filter is included in current sense block. This is the improved version with a pin out equivalent to world standard.

## Features

- Dynamic, Static & Feedback OVP
- Extremely Low Start up Current (30uA Typ.)
- Very Low Operating Current (4mA Typ.)
- Internal Self Start Timer
- Current Sense with Internal RC Filter
- Trimmed  $\pm 1.5\%$  internal Reference
- Under Voltage Lock Out with Hysteresis
- Pin Compatible to World Standard
- High Current Totem Pole Gate Drive


## Applications

- Electronic Ballast
- SMPS


## Ordering Information

| Type NO. | Marking | Package Code |
|----------|---------|--------------|
| S6500    | S6500   | SOP-8        |

## Outline Dimensions

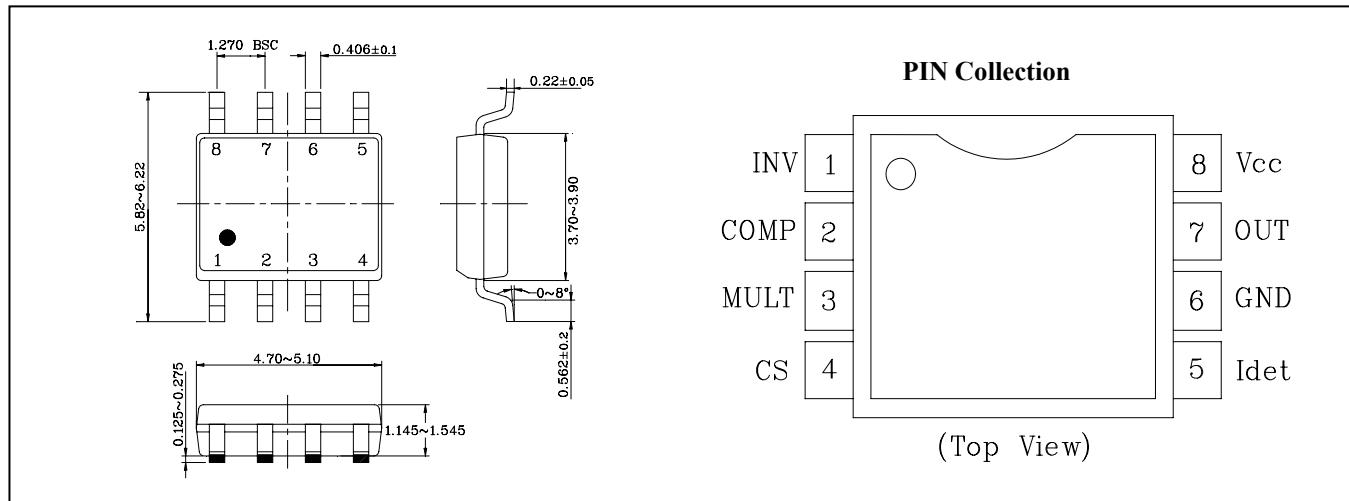**unit : mm**


## Internal Block Diagram

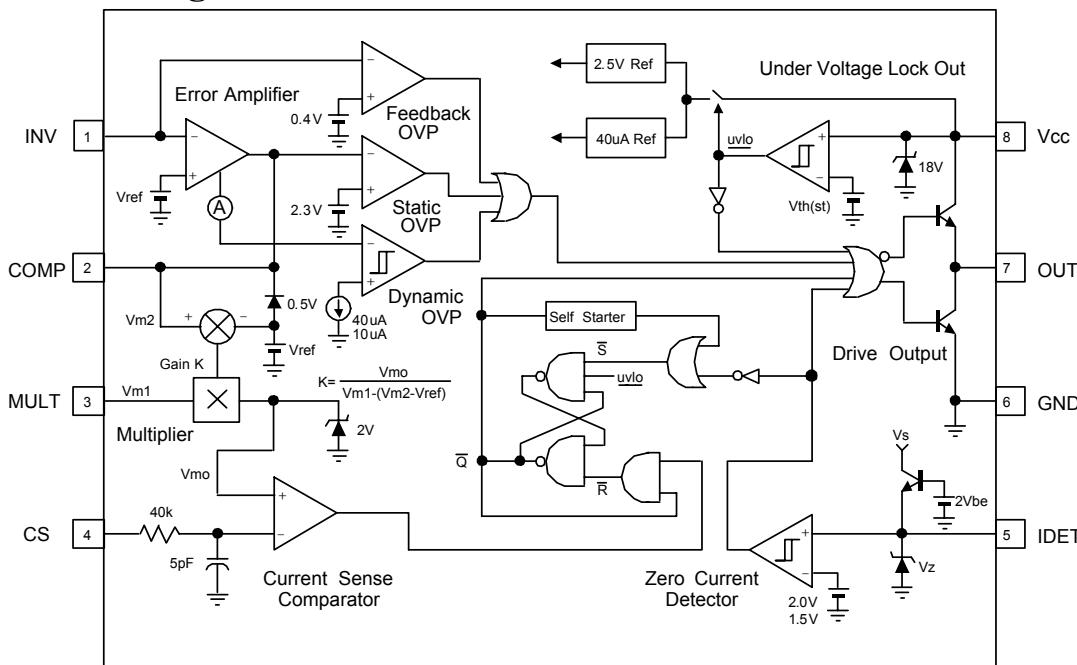

## Absolute Maximum Ratings

| Characteristics                                      | Symbol               | Value     | Units |
|--|----------------------|-----------|-------|
| Supply Voltage                                       | V <sub>CC</sub>      | 18        | V     |
| Supply voltage Regulator Maximum Current             | I <sub>CC(max)</sub> | 35        | mA    |
| Peak Drive Output Current                            | I <sub>oh, lol</sub> | ± 500     | mA    |
| Driver Output Clamping Diodes Vo>Vcc or Vo<-0.3V     | I <sub>clamp</sub>   | ± 10      | mA    |
| Detect Clamping Diodes                               | I <sub>det</sub>     | ± 10      | mA    |
| Error Amp, Compensation and Multiplier Input Voltage | V <sub>in</sub>      | -0.3 to 6 | V     |
| Power Dissipation @ Tamb=50°C                        | P <sub>d</sub>       | 0.65      | W     |

## Thermal Data

|                                     |                        |     |      |
|-------------------------------------|------------------------|-----|------|
| Thermal Resistance Junction-Ambient | R <sub>th(j-amb)</sub> | 100 | °C/W |
|-------------------------------------|------------------------|-----|------|

## PIN Function

| Pin Number | Pin Name | Pin Function Description   |
|------------|----------|--|
| 1          | INV      | Inverting input of the error amplifier. The output of the boost converter should be resistively divided to 2.5V and Connected to this pin.   |
| 2          | COMP     | Output of the error amplifier. A feedback compensation network is placed between this pin and the INV pin.   |
| 3          | MULT     | Input to the multiplier stage. The full wave rectified AC voltage is divided to less than 4V and is connected to this pin.   |
| 4          | CS       | Input to the comparator of the control loop. The MOSFET current is sensed by a resister and the resulting voltage is applied to this pin. An internal R/C filter is Included to reject any high frequency noise. |
| 5          | IDET     | Zero current detection input.  |
| 6          | GND      | Ground of the control section.   |
| 7          | OUT      | Gate drive output. A push pull output stage is able to drive the power MOSFET with peak current of 500mA.  |
| 8          | Vcc      | Supply voltage of driver and control circuits.   |

**Electrical Characteristics**V<sub>cc</sub>=12V, -25 °C ≤ Ta ≤ 125 °C, unless otherwise specified.

| Characteristic                                     | Symbol               | Test Condition                          | Min.                    | Typ.                   | Max.  | Unit |
|--|----------------------|---|-------------------------|------------------------|-------|------|
| <b>SUPPLY VOLTAGE &amp; CURRENT SECTION</b>        |                      |   |                         |                        |       |      |
| Start Threshold Voltage                            | V <sub>th(st)</sub>  | V <sub>cc</sub> Increasing              | 9.5                     | 10.5                   | 11.5  | V    |
| UVLO Hysteresis                                    | H <sub>Y(st)</sub>   | -                                       | 1.5                     | 2.5                    | 3.5   | V    |
| Start up Supply Current                            | I <sub>st</sub>      | V <sub>cc</sub> =9V                     | 5                       | 30                     | 50    | uA   |
| Operating Supply Current                           | I <sub>cc</sub>      | Output not switching                    | -                       | 3                      | 6     | mA   |
| Operating Current at OVP                           | I <sub>occ</sub>     | INV=3V                                  | -                       | 1.6                    | 2.5   | mA   |
| Dynamic Operating Supply Current                   | I <sub>dcc</sub>     | 50kHz, C <sub>l</sub> =1nF              | -                       | 4                      | 8     | mA   |
| Maximum Supply Voltage                             | V <sub>cc(max)</sub> | I <sub>cc</sub> =30mA                   | 17                      | 18                     | 19    | V    |
| <b>ERROR AMPLIFIER SECTION</b>                     |                      |   |                         |                        |       |      |
| Voltage Feedback Input Threshold                   | V <sub>ref</sub>     | I <sub>ref</sub> =0mA, Ta=25 °C         | 2.465                   | 2.5                    | 2.535 | V    |
| Line Regulation (note 1)                           | △V <sub>ref1</sub>   | 12V ≤ V <sub>cc</sub> ≤ 17V             | -                       | 0.1                    | 10    | mV   |
| Temperature Stability of V <sub>ref</sub> (note 1) | △V <sub>ref2</sub>   | Temp= -25 °C to 85 °C                   | -                       | 20                     | -     | mV   |
| Input Bias Current (Pin1)                          | I <sub>b(ea)</sub>   | -                                       | -0.5                    | -                      | 0.5   | uA   |
| Output Source Current                              | I <sub>source</sub>  | INV=2V, V <sub>m2</sub> =4V             | -2                      | -5                     | -     | mA   |
| Output Sink Current                                | I <sub>sink</sub>    | INV=3V, V <sub>m2</sub> =4V             | 3                       | 6                      | -     | mA   |
| Lower Clamp Voltage                                | V <sub>low</sub>     | INV=3V                                  | 1.9                     | 2                      | 2.1   | V    |
| <b>MULTIPLIER SECTION</b>                          |                      |   |                         |                        |       |      |
| Input Bias Current (Pin3)                          | I <sub>b(m)</sub>    | -                                       | -0.5                    | -                      | 0.5   | uA   |
| M1 Input Voltage Range (pin3) (note2)              | △V <sub>m1</sub>     | Range From 0V                           | 4                       | 4.5                    | -     | V    |
| M2 Input Voltage Range (pin2) (note2)              | △V <sub>m2</sub>     | Range From V <sub>ref</sub>             | V <sub>ref</sub><br>+25 | V <sub>ref</sub><br>+3 | -     | V    |
| Multiplier Gain (note 3)                           | K                    | V <sub>m</sub> =1V, V <sub>m2</sub> =4V | 0.45                    | 0.6                    | 0.75  | 1/V  |
| Maximum Multiplier Output Voltage                  | V <sub>mo(max)</sub> | INV=1V, V <sub>m1</sub> =4V             | 1.8                     | 2                      | 2.2   | V    |

## Electrical Characteristics


V<sub>CC</sub>=12V, -25°C ≤ T<sub>A</sub> ≤ 125°C, unless otherwise specified.

| Characteristic                              | Symbol                | Test Condition                             | Min. | Typ. | Max. | Unit |
|---|-----------------------|--|------|------|------|------|
| <b>CURRENT SENSE COMPARATOR</b>             |                       |  |      |      |      |      |
| Input Offset Voltage                        | V <sub>IO(cs)</sub>   | V <sub>M1</sub> =0V, V <sub>M2</sub> =2.3V | 0    | 10   | 25   | mV   |
| Input Bias Current (Pin4)                   | I <sub>B(cs)</sub>    | 0V ≤ V <sub>CS</sub> ≤ 1.8V                | -0.5 | -    | .5   | uA   |
| Current Sense Delay to Output (note2)       | t <sub>D(cs)</sub>    | -  | -    | 200  | 500  | ns   |
| <b>ZERO CURRENT DETECTOR</b>                |                       |  |      |      |      |      |
| Input Voltage Threshold                     | V <sub>TH(det)</sub>  | V <sub>DET</sub> Increasing                | 1.7  | 2    | 2.3  | V    |
| Detect Hysteresis                           | H <sub>Y(det)</sub>   | -  | 0.2  | 0.5  | 0.8  | V    |
| Input Low Clamp Voltage                     | V <sub>CLAMP(I)</sub> | I <sub>DET</sub> =-3mA                     | 0.4  | 0.8  | 1.2  | V    |
| Input High Clamp Voltage                    | V <sub>CLAMP(H)</sub> | I <sub>DET</sub> =3mA                      | 6    | 7.5  | 9    | V    |
| Input Bias Current (Pin5)                   | I <sub>B(det)</sub>   | 1V ≤ V <sub>DET</sub> ≤ 5V                 | -1   | -0.1 | 1    | uA   |
| Input High/Low Clamp Diode Current (note 2) | I <sub>CLAMP</sub>    | -  | -    | -    | ±3   | mA   |
| <b>OUTPUT SECTION</b>                       |                       |  |      |      |      |      |
| Output Voltage High                         | V <sub>OH</sub>       | I <sub>O</sub> =10mA                       | 8.5  | 10   | -    | V    |
| Output Voltage Low                          | V <sub>OL</sub>       | I <sub>O</sub> =10mA                       | -    | 1.5  | 2    | V    |
| Rising Time (note2)                         | t <sub>R</sub>        | C <sub>L</sub> =1nF                        | -    | 120  | 200  | nS   |
| Falling Time (note2)                        | t <sub>F</sub>        | C <sub>L</sub> =1nF                        | -    | 50   | 120  | nS   |
| Output Voltage with UVLO Activated          | V <sub>O(UVLO)</sub>  | V <sub>CC</sub> =5V, I <sub>O</sub> =50uA  | -    | -    | 1    | V    |
| <b>SELF STARTER SECTION</b>                 |                       |  |      |      |      |      |
| Self Start Time Delay (note2)               | t <sub>D(ss)</sub>    | V <sub>M1</sub> =1V, V <sub>M2</sub> =3.5V | -    | 150  | -    | us   |
| <b>OVER VOLTAGE PROTECTION SECTION</b>      |                       |  |      |      |      |      |
| Feedback OVP Threshold Voltage              | V <sub>TH(f)</sub>    | -  | 0.3  | 0.4  | 0.5  | V    |
| Dynamic OVP Detecting Current               | I <sub>OVP(d)</sub>   | -  | 35   | 40   | 45   | uA   |
| Static OVP Threshold Voltage                | V <sub>TH(s)</sub>    | -  | 2.15 | 2.3  | 2.45 | V    |


- Note : 1) Because the reference is not brought out externally, this specification can't be tested on the package Part. It is guaranteed by design.
- 2) This parameter, although guaranteed, is not tested in production.
- 3) Multiplier gain K = V<sub>MO</sub> / (V<sub>M1</sub> × (V<sub>M2</sub>-V<sub>REF</sub>))

## Electrical Characteristic Curves


**Fig. 1 Supply Voltage vs. Supply Current**

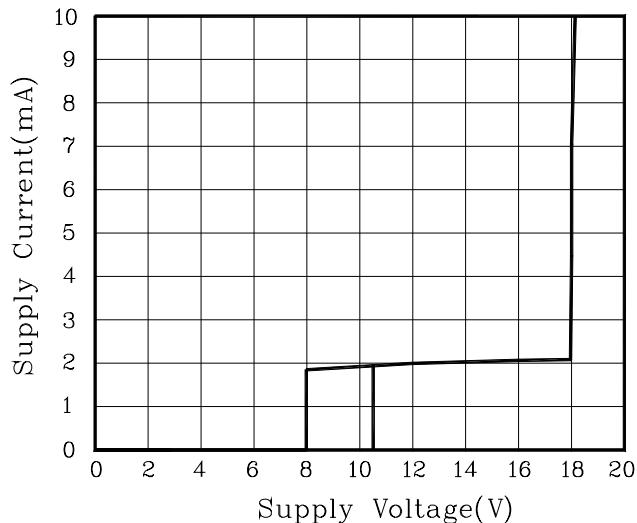


**Fig. 2 Supply Voltage vs. Startup Current**

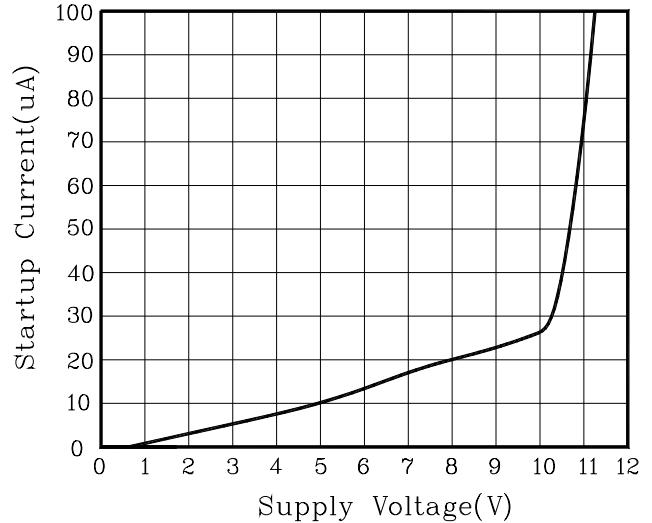


**Fig. 3 Temperature vs. Voltage Feedback Input Threshold**

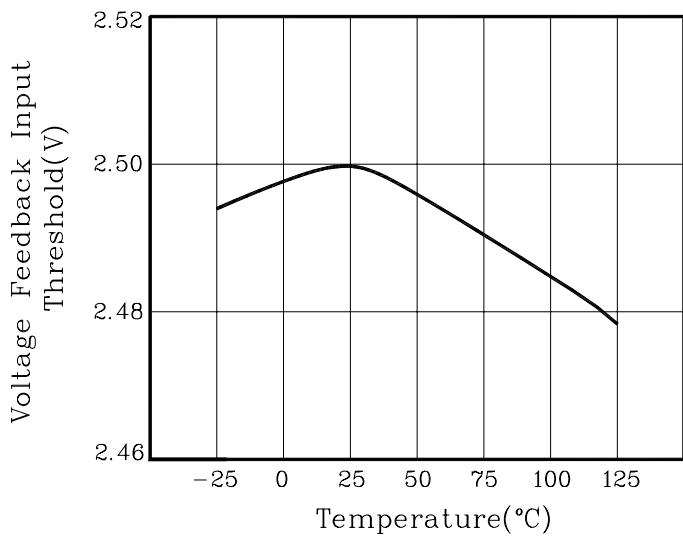


**Fig. 4 Supply Voltage vs. Operating Supply Current**

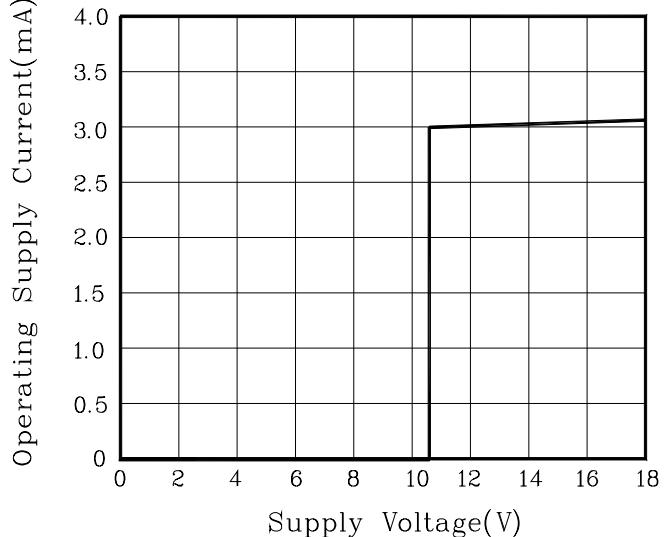

**Fig. 5 Supply Voltage vs. Operating Current at OVP**

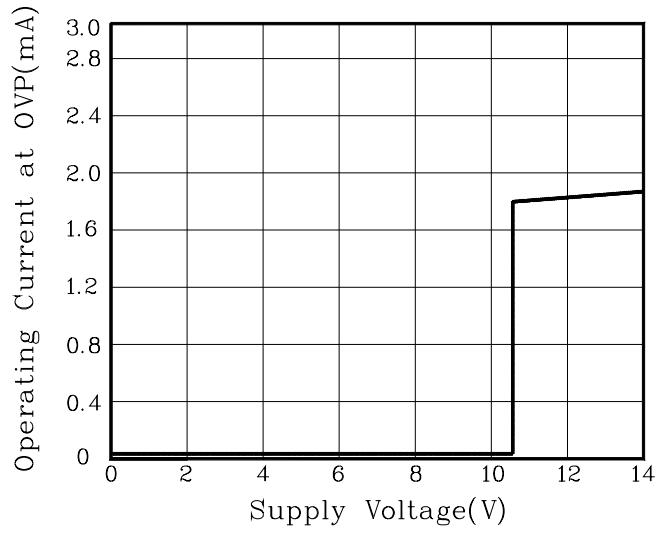


**Fig. 6 Maximum Supply Voltage vs. Supply Current**

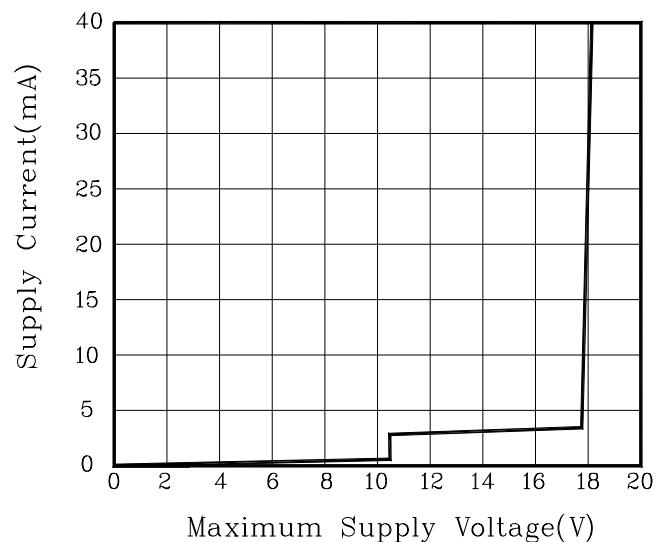


## Electrical Characteristic Curves


**Fig. 7 Idet Input Voltage vs. Output Voltage**

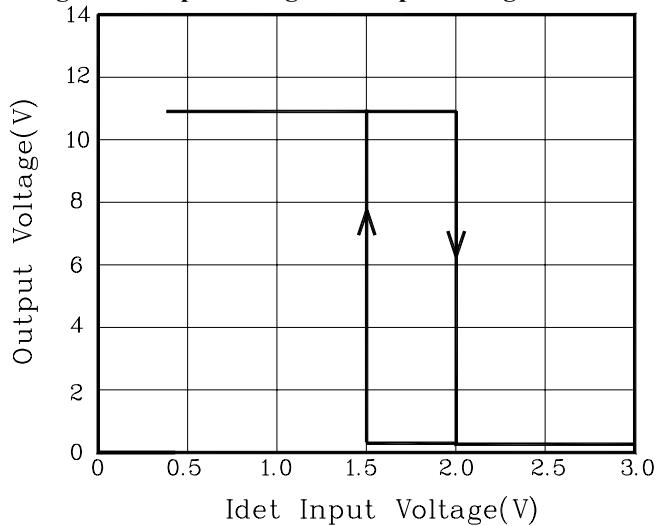


**Fig. 8 Multiplier Input Voltage vs. CS Threshold Voltage**

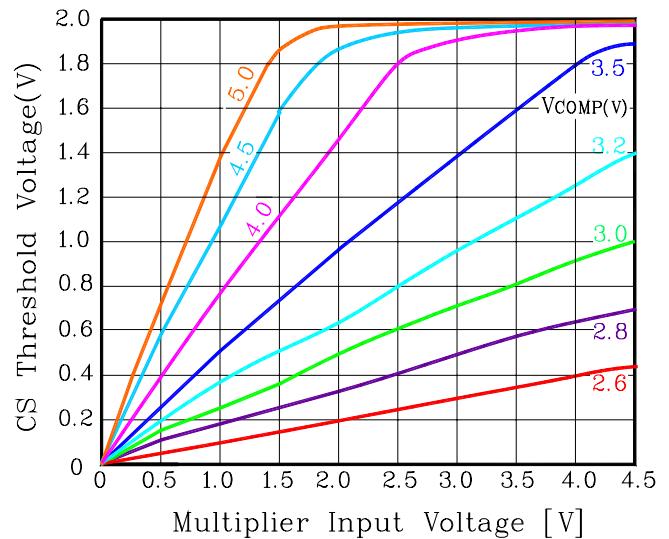

**Fig. 9 Idet Input Voltage vs. Input Low Clamp Voltage**

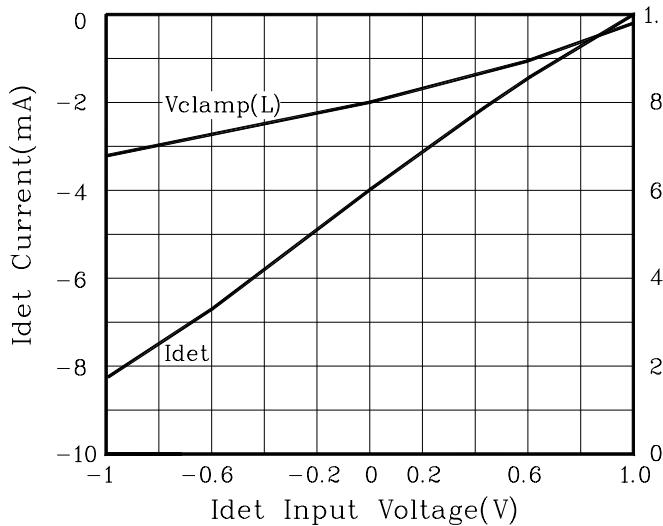

**Fig.10 Idet Input Voltage vs. Input High Clamp Voltage**

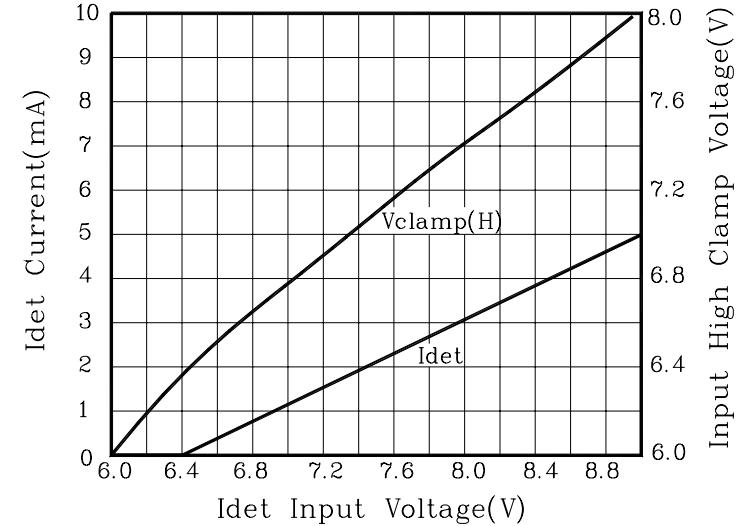

**These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).**

**Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).**

**AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.**

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.