# Product Preview Low Standby Power SMPS Controller

NCP1225 is a low standby power Switch–Mode Power Supply, SMPS controller IC specially designed for low power AC–DC adapter applications. The device operates in Discontinuous Conduction Mode (DCM) with Pulse Frequency Modulation (PFM) control scheme. PFM operation can provide high operating efficiency even at light loading conditions and the device itself takes extremely low operating current. With careful circuit design, low standby power down to 300 mW can be achieved for universal line input low power adapters. This specific feature can help the end products to comply with immediate and future international power saving regulations easily.

An innovative feedback compensation scheme is integrated in NCP1225 to eliminate the expensive optocoupler in the feedback path. By only using simple auxiliary winding feedback, the regulator still can achieve good output voltage regulation usually not possible with common SMPS controller ICs without optocoupler. For even better regulation applications, optocoupler feedback can still be used in place. Additionally, value–added features as overvoltage protection, undervoltage lockout and overcurrent protection functions are also included. This controller is an ideal solution for low power adapters and mobile phone chargers. With all valuable features, this device is available in the tiny TSOP–5 package.

#### Features

- Current Mode Operation
- Cycle–By–Cycle Current Limiting
- High Efficiency Pulse Frequency Modulation (PFM) Control
- Low Device Operating Current, 0.5 mA Typical
- No Optocoupler Feedback Control
- Extremely Low Standby Power
- Internal Leading Edge Blanking
- Input Undervoltage Lockout Protection
- Output Overvoltage Protection
- Optional Optocoupler Feedback
- Micro Miniature TSOP-5 Package


#### **Typical Applications**

- Low Power Wall Mount Adapters
- Mobile Phone Adapter Chargers
- TV/Computer Auxiliary Power Supply




## ON Semiconductor®

http://onsemi.com



#### **PIN CONNECTIONS**



#### **ORDERING INFORMATION**

Device	Package	Shipping
TBD	TSOP-5	TBD

This document contains information on a product under development. ON Semiconductor reserves the right to change or discontinue this product without notice.

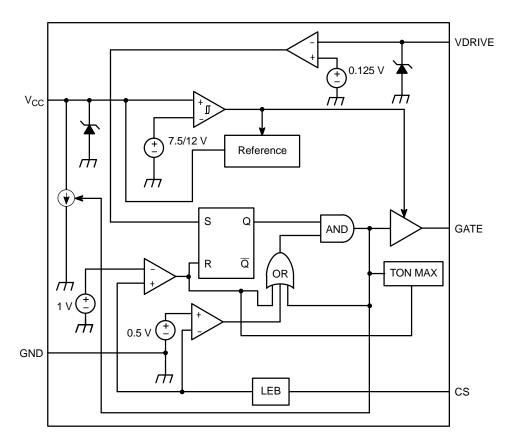


Figure 1. Simple Block Diagram

## PIN FUNCTION DESCRIPTION

Pin	Symbol	Description		
1	V <sub>CC</sub>	This pin is the supply of the IC. When voltage at this pin is higher than 12 V typical, the operation will be activated.		
2	GND	This pin is the ground of the primary side of the system.		
3	VDRIVE	This pin is also used to detect the current status of secondary winding.		
4	CS	The Current Sense pin senses the voltage developed across the current sensing resistor in series with the power MOSFET. This information is used to terminate the output switch conduction cycle.		
5	GATE	Controller output to the gate of the power MOSFET.		

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Supply Voltage, V <sub>CC</sub>	V <sub>CC</sub>	-0.3 to 16	V
Gate Output Current, Source Current (Note 1)	I <sub>O_SRC</sub>	350	mA
Gate Output Current, Sink Current (Note 1)	I <sub>O_SINK</sub>	450	mA
Thermal Characteristics TSOP–5 Plastic Package, Case 483 Thermal Resistance, Junction–to–Air	R <sub>θJA</sub>	250	°C/W
Current Sense, CS Input Voltage	V <sub>CS</sub>	-0.3 to 10	V
VDRIVE Input Voltage	V <sub>DRIVE</sub>	-0.3 to 10	V
Gate Voltage	V <sub>GATE</sub>	-0.3 to 16	V
Operating Junction Temperature	TJ	-25 to +150	°C
Operating Ambient Temperature	T <sub>A</sub>	-25 to +105	°C
Storage Temperature Range	T <sub>stg</sub>	-65 to 150	°C
ESD Capability, HBM Model	-	2.0	KV
ESD Capability, Machine Model	-	200	V

1. Maximum package power dissipation limits must be observed.

## ELECTRICAL CHARACTERISTICS

(For typical values V<sub>CC</sub> = 13 V,  $T_A$  = 25°C, and for min/max values  $T_A$  = -25°C to +105°C, unless otherwise noted.)

Characteristic	Symbol	Min	Тур	Max	Unit
CURRENT SENSE COMPARATOR (PIN 4)	·				
Current Sense Reset Threshold	V <sub>CS_RESET</sub>	0.95	1.0	1.05	V
Current Sense Set Threshold	V <sub>CS_SET</sub>	0.475	0.5	0.525	V
Input Bias Current	I <sub>IB</sub>	_	TBD	-	μΑ
Propagation Delay (Current Sense Input to Output)	t <sub>PLH</sub>	-	200	-	ns
VDRIVE (PIN 3)					
Vdrive Sense Pin Threshold	V <sub>DRIVE_SET_TH</sub>	0.118	0.125	0.131	V
Input Bias Current	I <sub>VDRIVE_IB</sub>	-	50	-	nA
GATE (PIN 5)					
Output Voltage Rise Time (C <sub>L</sub> = 1.0 nF, T <sub>A</sub> = $25^{\circ}$ C)	t <sub>R</sub>	-	55	-	ns
Output Voltage Fall Time (C <sub>L</sub> = 1.0 nF, T <sub>A</sub> = 25°C)	t <sub>F</sub>	-	40	-	ns
Output Voltage Low State (Isink = 20 mA) (Isink = 100 mA)	V <sub>OL</sub>		0.27 1.5		V
High State (Isource = 20 mA) (Isource = 100 mA)	V <sub>OH</sub>	-	11.7 10		V
Gate Signal Maximum ON Time	T <sub>ON(MAX)</sub>	8.0	10	12	μs
UNDERVOLTAGE LOCKOUT (PIN 1)					
Start–Up Threshold (V <sub>CC</sub> Rising)	V <sub>TH(ON)</sub>	11	12	13	V
Minimum Operation Voltage After Turn–On	V <sub>CC(MIN)</sub>	6.5	7.5	8.5	V
OVERVOLTAGE PROTECTION (PIN 1)					
Overvoltage Protect (OVP) Threshold	V <sub>TH(OVP)</sub>	13.5	14.5	15.5	V
TOTAL DEVICE					
Power Supply Current Startup (V <sub>CC</sub> = 10 V)	I <sub>START</sub>	-	-	60	μΑ
Operating Current (No Switch, $T_A = 25^{\circ}C$ )	I <sub>CC</sub>	-	0.5	-	mA


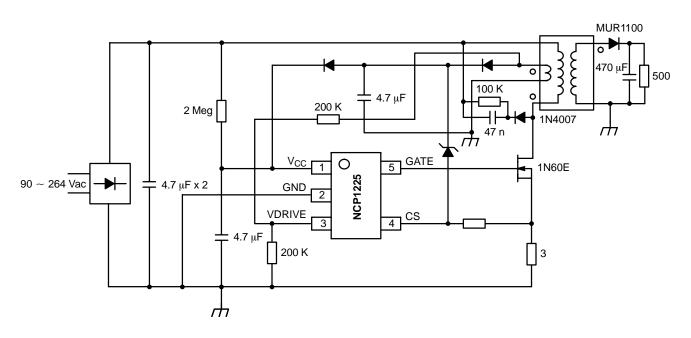


Figure 2. Typical Application Circuit Without Optocoupler

#### PACKAGE DIMENSIONS

TSOP-5 SN SUFFIX CASE 483-02 ISSUE C






NOTES

2.

3.

Y14.5M. 1982.



DIMENSIONING AND TOLERANCING PER ANSI

MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS

CONTROLLING DIMENSION: MILLIMETER.

IS THE MINIMUM THICKNESS OF BASE

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications thended to support or sustain life, or for any other application intended or unauthorized application, Buyer shall indemify and hold SCILLC and is officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manuforture is subject to all applicable copyright have and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center 2–9–1 Kamimeguro, Meguro–ku, Tokyo, Japan 153–0051 Phone: 81–3–5773–3850 ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.